


### 3. Construction

All models are very simple in construction. (See Figure 9, 10)

#### (1) Headstock

The headstock can be moved vertically by turning the spindle head adjusting handle. Before turning the handle, be sure to loosen the clamp bolts. Do not forget to reclamp after positioning.

Fig. 9 (Model BR2-121)

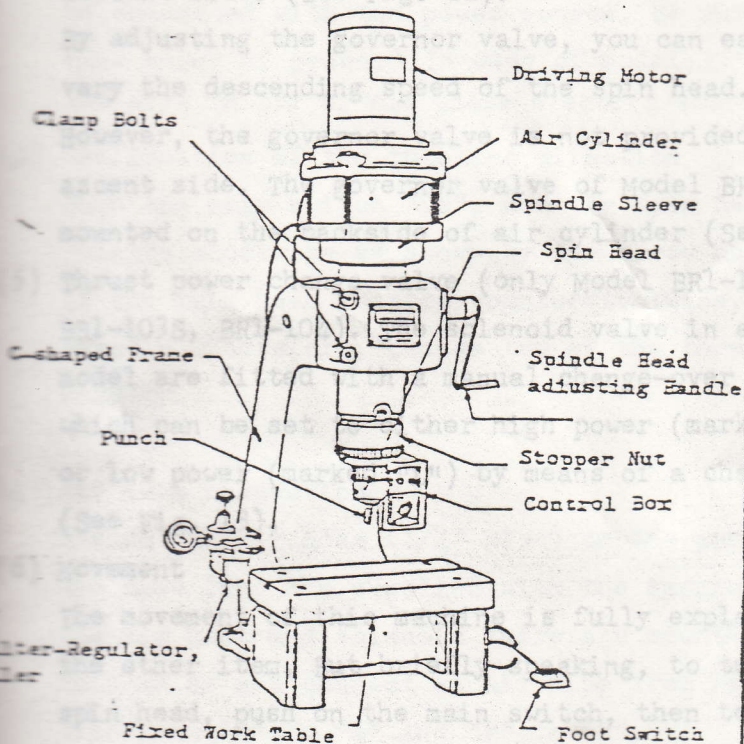

#### (2) Control Box

Mounted on the right side of the frame is control box, housing the control equipments, and is faced with the main switch, pilot lamp and timer knob in convenient position. In horizontal type, the control box, filter-regulator, oiler and solenoid valve are attached to the separate panel in a set.

Fig. 10 (Model BR1-104)

