
AUTOMATIC HYDRAULIC BAND SAW WITH NUMERICAL CONTROL

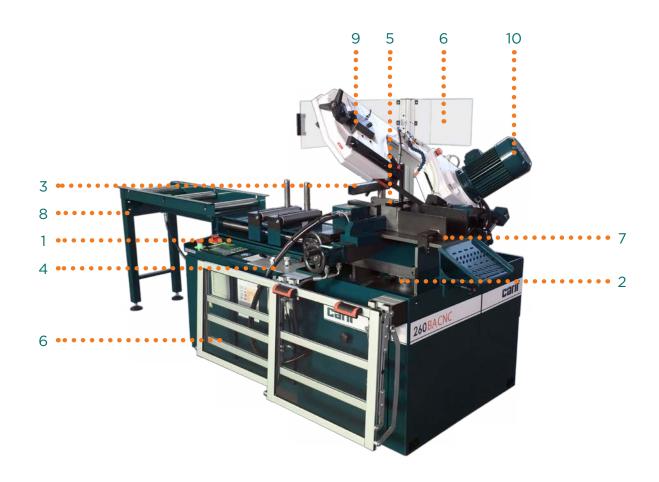

Standard Features:

- 1. 2 Axes numerical control with USB keyfor updates
- Easy and fast storage up to 100 cutting programs with visualization of all parameters
- 2. Graduated plate for miter cutting 0/60° independent from the plans for pieces support
- 3. 2 Mechanical devices for vertical clamping of bars
- 4. Hydraulic block for a fine regulation of bow feed and cutting pressure
- 5. Hardened and carburized jaws for strong fixture and moving of full bars
- 6. Safety guards front and back
- 7. Wide Plans for piece support for a comfortable and practical cutting area
- 8. Roller-unit L=1m for bar support
- 9. Sensor for monitoring blade rotation
- 10. Speed moto-variator, electronic version Kw 2,2
- Complete coolant equipment of 50 Lt. tank with electro-pump
- 35Lt. Hydraulic oil for hydraulic power-pack
- Bimetal blade M42 mm 2450x27x0,9, cardboard box + pallet, service wrenches, instruction manual and spare parts list

260 BA CNC CATIF

CUTTING CAPACITY

90°		+45°	+60°	+90°		+45°	+60°	+90°		+45°	+60°	90° opt.
220		150	90	220*/ 205		150	60	260 x 150		150 x 150	90 x 60	130 x 90
* With thickness									LxH			

___.

TECHNICAL F	FEATURES
-------------	-----------------

m	(KW)			Kg	B B +-		+ H	
mm	KW	m/1'	mm	Kg	В	L	H*	h
2450x27x0,9	2,2-0,75-0,09	15÷100	260	700	1650	2560	1650/ 1300	830

H* Bow up / Bow down

Optional

- 1. Air/oil lubrication system 3lt. 2 elements
- 2. Digital angle display
- 3. Laser line for positioning
- 4. Hydraulic device for vertical clamping of bars
- 5. Working LED light
- 6. Flushing hose
- 7. Slide for cut pieces



Rulliere

Modular roller-unit type "A" : length 1m - width 400 mm - capacity 0,9 t/m Modular roller-unit type "B" : length 1m - width 400 mm - capacity 0,9 t/m Plan type "C" for connection roller-unit type "A" to the machine : width 400 mm

